

Programmable DC Power Supply (Solar Array Simulation)



PROGRAMMABLE DC POWER SUPPLY (SOLAR ARRAY SIMULATION) MODEL 62000H-S SERIES

The latest programmable solar array simulator power supply 62000H-S Series released by Chroma provide simulation of Voc (open circuit voltage) up to 1000V and Isc (short circuit current) up to 25A. The 62000H-S provides an industry leading power density in a small 3U high package. The solar array simulator is highly stable and has a fast transient response design, which are both advantageous to MPPT performance evaluation on PV inverter devices.

The 62000H-S Series have many unique advantages including high speed & precision digitizing measurement circuits with a 100kHz A/D, 25kHz D/A controlled I-V curve and a digital filter mechanism. It can simulate an I-V curve accurately and respond the mains ripple effect from the PV inverter. In addition, the built-in EN50530/Sandia SAS I-V model in the standalone unit can easily program the Voc, Isc, Vmp, and Imp parameters for I-V curve simulation, without a PC controller.

The real solar array is influenced by various weather conditions such as irradiation, temperature, rain and shade by trees or clouds, which will affect the I-V curve output. The 62000H-S Series are capable of storing up to 100 I-V curves into the simulator memory, with a programmed time interval range of 1-15,000 seconds. It can simulate the I-V curve from the early morning to nightfall for PV inverter testing or dynamic I-V curve transient testing.

The 62000H-S Series have a built-in 16 bit digital control and precision voltage & current measurement circuits with a voltage accuracy of 0.05% + 0.05% F.S. and a current accuracy of 0.1% + 0.1% F.S.. It is ideal for real time MPPT analysis and tracking monitoring for PV inverters through our softpanel. The user can also enable the data recording function on the softpanel during the static MPPT performance test.

When high power solar array simulation is required, it is common to connect two or more power modules in parallel. The 62000H-S Series with a current range up to 25A and a voltage range up to 1000V offers a high power density envelope maximum of 15kW in a 3U package. It can easily parallel up to ten units in a Master/Slave configuration to provide 150kW with current sharing and synchronized control signals for commercial utility PV inverter (10kW ~100kW) testing. The 62000H-S Series supplies have a smart Master/Slave control mode that makes the parallel operation fast and simple. In this mode, the master scales values and downloads data to slave units so that the programming is as simple as using a standalone unit.

The 62000H-S Series DC power supplies are very easy to operate from the front panel keypad or from the remote controller via USB/RS232/RS485/ APG (standard) and GPIB & Ethernet (optional). Its compact size (3U) makes it ideal for both benchtop and standard racking.

MODEL 62000H-S Series

Key Features :

- Voltage range : 0 ~150V/600V/1000V/1500V
- AC input voltage range : 200/220Vac, 380/400Vac, 440/480Vac
- 3U/15kW high power density module with easy master/slave parallel operation up to 1.5MW
- Fast transient response solar array simulation
- Simulation of multiple solar cell material's I-V characteristic (fill factor)
- Simulation of dynamic irradiation intensity and temperature level from clear day to cloud cover conditions
- Shadowed I-V curve output simulation (up to 4096 data points)
- Low leakage current (< 3mA)
- Precision V & I measurements
- Auto I-V program: 100 I-V curves & Dwell time 1-15,000s
- Static & dynamic MPPT efficiency test (accumulated energy methods)
- Data recorded via softpanel
- Standard USB / RS232 / RS485 interface
- Optional GPIB / Ethernet interface
- Real time analysis of PV inverter's MPPT tracking via softpanel
- Optional graphic user interface - softpanel for operation
- Real world weather simulation fast I-V curve update rate : 1s
- Support up to ten-channel SAS control for multi-MPPT testing
- Build-in dynamic MPPT test profile of EN50530, Sandia, CGC/GF004 and NB/T 32004




Chroma




SOLAR ARRAY I-V CURVE SIMULATION POWER SUPPLY

The Model 62000H-S Series have a built-in EN50530 and Sandia's SAS model that can easily program the Voc, Isc, Vmp, Imp parameters to simulate different solar cell materials I-V characteristic outputs with fast response time. Moreover, the TABLE mode is capable of saving a 128~4096 point array of user programmed voltages and currents via a remote interface. It can easily create a shadowed I-V curve and the I-V PROGRAM mode can save up to 100 I-V curves and dwell time intervals (1-15,000s) in memory. These advantages provide steady repetitive control conditions required for PV Inverter design as well as for verification testing. The solar array simulator is ideal for the following testing:


- Design and verify the maximum power tracking circuit and algorithm of the PV inverter
 - Verify the high/low limit of operating input voltage allowed for the PV inverter
 - Verify the high/low limit of operating input voltage allowed for the inverter's maximum power point
 - Verify the static maximum power point tracking efficiency of the PV inverter.
 - Measure and verify the overall efficiency & conversion efficiency of PV inverter *
 - Verify the maximum power point tracking performance of the inverter for dynamic curves. (EN50530, Sandia, CGC/GF004, NB/T 32004 standard)
 - Verify the maximum power point tracking performance of the inverter under different time period conditions spanning from morning to nightfall
 - Verify the maximum power point tracking mechanism of the inverter for the I-V curve when the solar array is shaded by clouds or trees
 - Simulate the I-V curve under the actual environmental temperatures within burn-in room to do inverter burn-in testing
- *Requires an extra power meter.

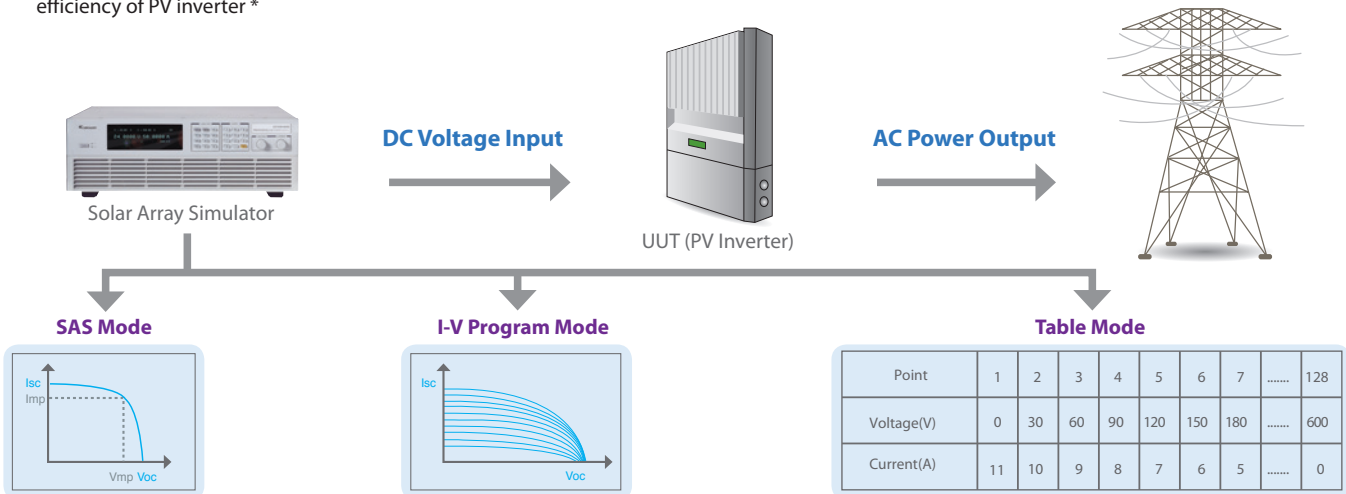

SOLAR ARRAY I-V CURVE SIMULATION SOFTPANEL

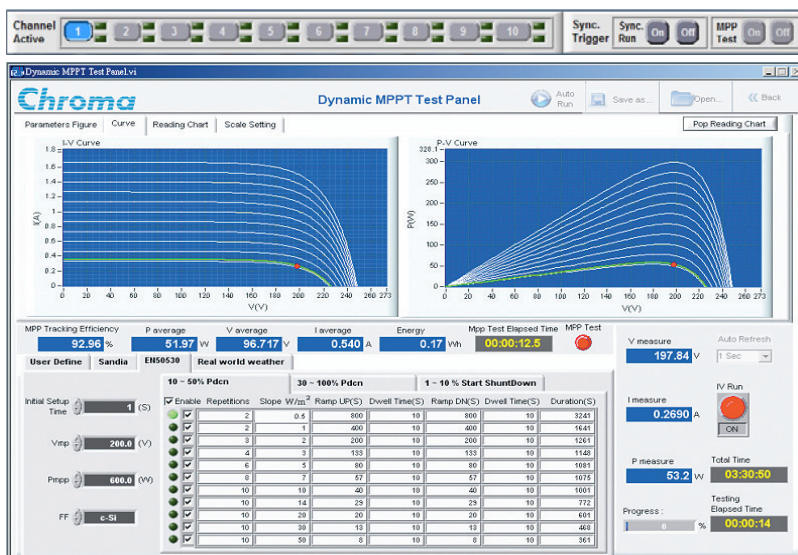

Solar Array Simulation Softpanel

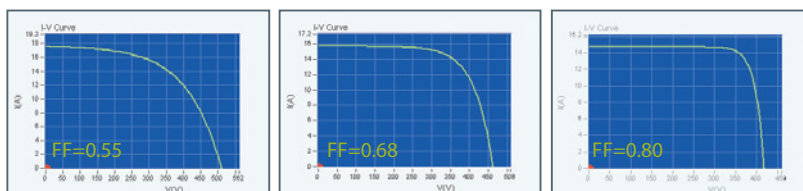

Thin-Film

Standard Crystalline Array

High-efficiency Crystalline

The model 62000H-S Series include a graphical user Interface software through remote digital interface (USB / GPIB / Ethernet / RS232) control. The user can easily program the I-V curve of the 62000H-S Series as well as the I-V & P-V curves for real-time testing. In addition it will display the MPPT status for the PV inverter. Readings and the report function with real-time monitoring using the softpanel are shown left.


SIMULATES DIFFERENT SOLAR CELL MATERIALS I-V CHARACTERISTIC (FILL FACTOR)

The purpose of the PV inverter is to convert the dc voltage (from solar array) to the ac power (utility). The better a PV inverter can adapt to the various irradiation & temperature conditions of sun, the more power that can be fed into the utility grid over time. So, the MPPT performance is a very important factor for PV generation system. The model 62000H-S Series are capable of simulating different types of standard crystalline, multi-crystalline and thin-film fill factor* parameters to verify the MPPT tracking algorithm mechanism and efficiency.

*Fill Factor = $(Imp * Vmp) / (Isc * Voc)$

STATIC MPPT EFFICIENCY TESTING

The 62150H-600S DC power supply with solar array simulation can program the I-V curve through SAS mode and table mode via front panel or softpanel easily and up to 100 I-V curves can be stored in the unit. The user can recall the I-V curve from 62150H-600S afterwards for testing and monitoring the MPPT performance of PV inverter with the real-time tracking feature. The softpanel allows the user to set the duration for static MPPT efficiency testing. Each curve test time should be set at between 60s-600s for best MPPT efficiency performance analysis.

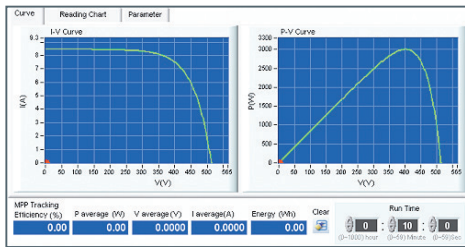


$$\eta_{MPPT} = \frac{1}{P_{mpp} \cdot T_M} \sum V_{dc} \cdot I_{dc} \cdot \Delta T$$


V_{dc} = Sampled value of the inverter's input voltage
 I_{dc} = Sampled value of the inverter's input current
 T_M = Overall measuring period
 P_{mpp} = MPPT power provided by the solar array simulator power supply

DYNAMIC MPPT EFFICIENCY TESTING

The latest test standards EN50530, CGC/GF004 & Sandia have provided a procedure for testing patterns of the dynamic MPPT efficiency of inverters, those standards can accelerate the MPP tracking algorithm mechanism to the optimal for PV inverter manufactures. The advanced Dynamic MPPT Test function complies with EN50530, CGC/GF004, Sandia test regulations and can be controlled via the graphical softpanel by selecting CGC/GF004 or Sandia or EN50530 I-V mathematical expressions and test items. This function simulates the irradiation intensity and temperature change of the I-V curve under actual weather variations to test the PV inverter's dynamic MPPT performance. The GUI will calculate the MPPT performance for analysis after running the test. A test data recording function is integrated into the software where users can edit and control the test parameters to be recorded such as voltage, current, power, watt and MPPT performance along with the sampling interval (1 - 10,000s) and total time length to facilitate the analysis and validation of the PV inverter.

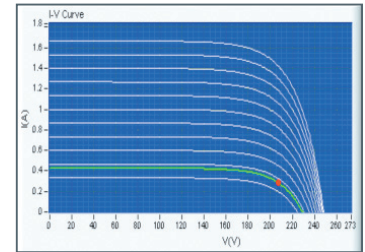


User Define	Sandia	EN50530 & CGC/GF004	Real world weather
Initial Setup	1 (S)	10 - 50% Pdcn	30 - 100% Pdcn
Vmp	300.0 (V)	Enable Repetitions	1 - 10 % Start Shutdown
Pmpp	600.0 (W)	2 0.6 600 10 1000 10 1000 10 1000 10 1000	
FF	0.5	3 2 300 10 1000 10 1000 10 1000 10 1000	
		4 3 120 10 1000 10 1000 10 1000 10 1000	
		5 3 30 10 1000 10 1000 10 1000 10 1000	
		6 5 30 10 1000 10 1000 10 1000 10 1000	
		7 7 22 10 1000 10 1000 10 1000 10 1000	
		8 10 10 10 1000 10 1000 10 1000 10 1000	
		9 10 14 20 10 1000 10 1000 10 1000 10 1000	
		10 20 20 20 10 1000 10 1000 10 1000 10 1000	
		11 30 10 10 10 1000 10 1000 10 1000 10 1000	
		12 10 50 1 10 10 10 1000 10 1000 10 1000	

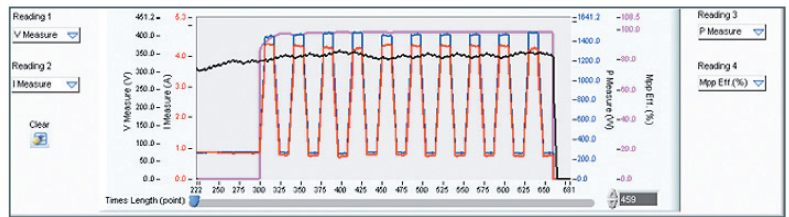


SHADOW I-V CURVE SIMULATION

It has easy-to-use software to simulate the shadowed I-V curve and its dynamic change as the figure shown aside. The user can select the PV Module from the database or create individual PV module parameters for storage; and then set the amount of PV string to form a PV Array in series or parallel. Next, the user can set the irradiation, temperature, moving direction and time of dynamic shadowed change for PV Module that can simulate the cloud cover change or make Shadow I-V curve simulation for other shadow such as under the trees or the buildings. Each I-V curve is formed with maximum 4096 data points of voltage and current.

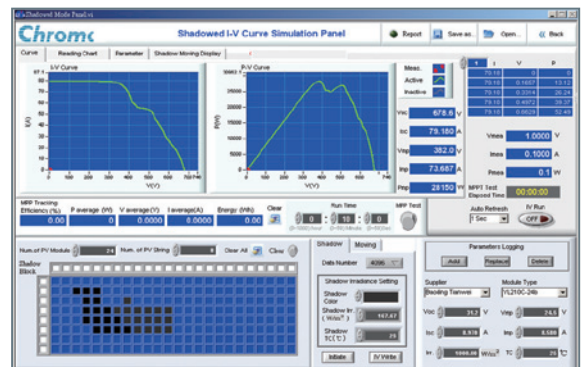


EVALUATING THE PV INVERTER'S CONVERSION EFFICIENCY *

The photovoltaic I-V curve model of Sandia Lab and EN50530's built in the softpanel allows the user to input the maximum dc input power (Pmax), I-V Fill Factor, Vmin, Vnom and Vmax desired to test the PV Inverter. Click the maximum power percentage value (5%, 10%, 20%, 25%, 30%, 50%, 75%, 100%) desired directly and , the softpanel will produce the tested solar cell I-V curve automatically. Next, download it to the standalone unit to start simulating the I-V curve for the PV Inverter to test the conversion efficiency. *Required an extra power meter.

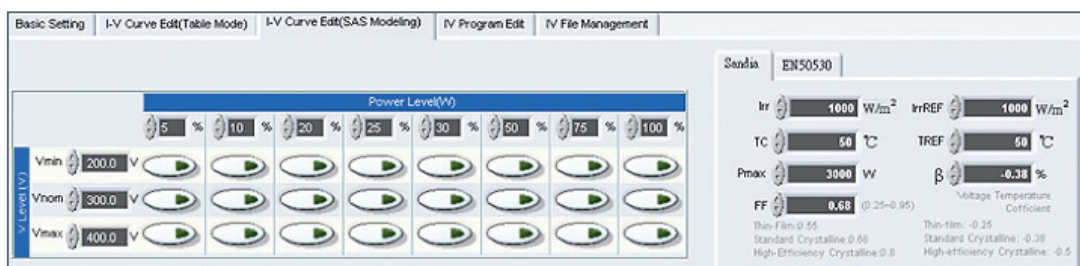

REAL WORLD WEATHER SIMULATION


The real world weather simulation function allows the user to import real conditions of irradiation and temperature profiles of a whole day from excel file to Softpanel, in order to simulate the irradiation intensity and temperature level from early morning to nightfall. It can also set the interval time resolution to 1s for I-V curve update rate and enable the user to perform MPPT tracking tests under the simulation of actual weather environments.

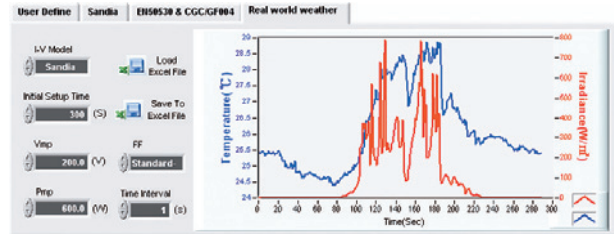

AUTO RUN FUNCTION OF STATIC & DYNAMIC MPPT TESTING

In order to easily test the static & dynamic MPPT performance of standard EN50530 & Sandia for PV inverter, the SoftPanel has an auto run function, which the user only has to set the Vmin, Vnom, Vmax, Pmax, Stabilization time & Testing period time parameter and testing items of EN50530 & Sandia, then the softpanel can run tests automatically and generate reports after finished.


EN50530 Dynamic MPPT Efficiency Test Report (30%~100%)							
From-to W/m ²	Delta W/m ²		Pmp Value (W)	Vnom (V)	c-Si technology	Waiting time setting (S)	
300-1000	700		2000.00	350.00		300	
#number	Slope W/m ²	Ramp UP (S)	Dwell time (S)	Ramp DN (S)	Dwell time (S)	Duration (S)	MPPT Efficiency (%)
10	10.0	70	10	70	10	1900	99.89
10	14.0	50	10	50	10	1500	99.90
10	20.0	35	10	35	10	1200	99.87
10	30.0	23	10	23	10	967	99.84
10	50.0	14	10	14	10	780	99.86
10	100.0	7	10	7	10	640	99.71
Total						6987 s	99.84
						01 : 56 : 27 h	

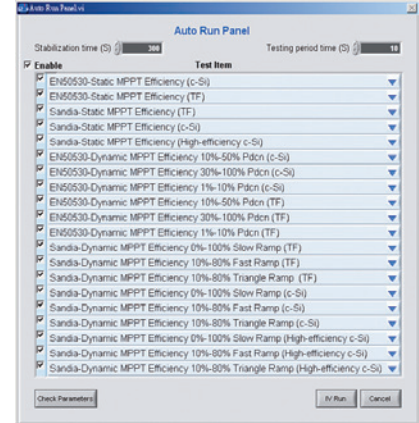

EN50530 Static MPPT Efficiency Test Report										
MPPT voltage of the simulated I/U characteristic of the PV generator	Simulated I/U characteristic	Pmp Value(W)=1000.00								
		0.050	0.100	0.200	0.250	0.300	0.500	0.750	1.000	
Umin = 200.0	c-Si	99.510	98.703	99.589	99.728	99.533	99.868	99.930	99.908	
Unom = 300.0	c-Si	99.478	99.609	99.661	99.702	99.791	99.896	99.837	99.848	
Umax = 400.0	c-Si	99.452	99.040	99.701	99.036	99.779	99.751	99.908	99.936	


REPORT FUNCTION


The softpanel also provides data recording capabilities, which include: voltage, current, power, energy and MPPT efficiency and the corresponding parameter sampling time (1s~10000s) for the recording process. The report can be utilized for R&D design characterization verification, QA verification and production quality control.

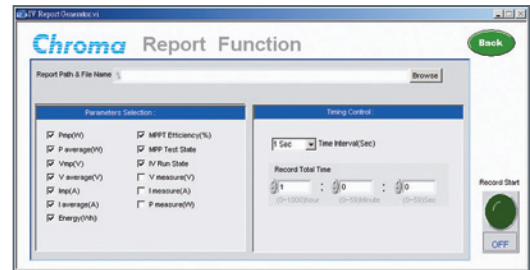


MASTER / SLAVE PARALLEL OPERATION UP TO 150KW

When high power is required, it is common to connect two or more power supplies in parallel. The 62000H-S series supplies have a smart master / slave control mode making the parallel operation fast and simple. In this mode, the master scales values and downloads data to slave units with a high speed sync signal process and automatic current sharing control.

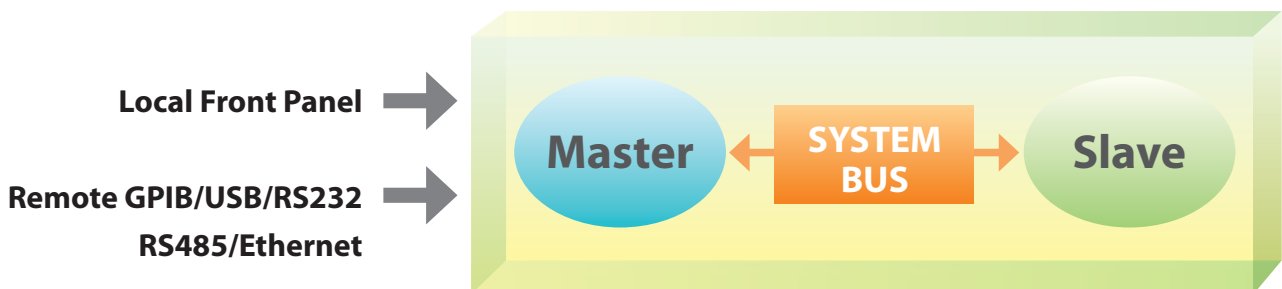

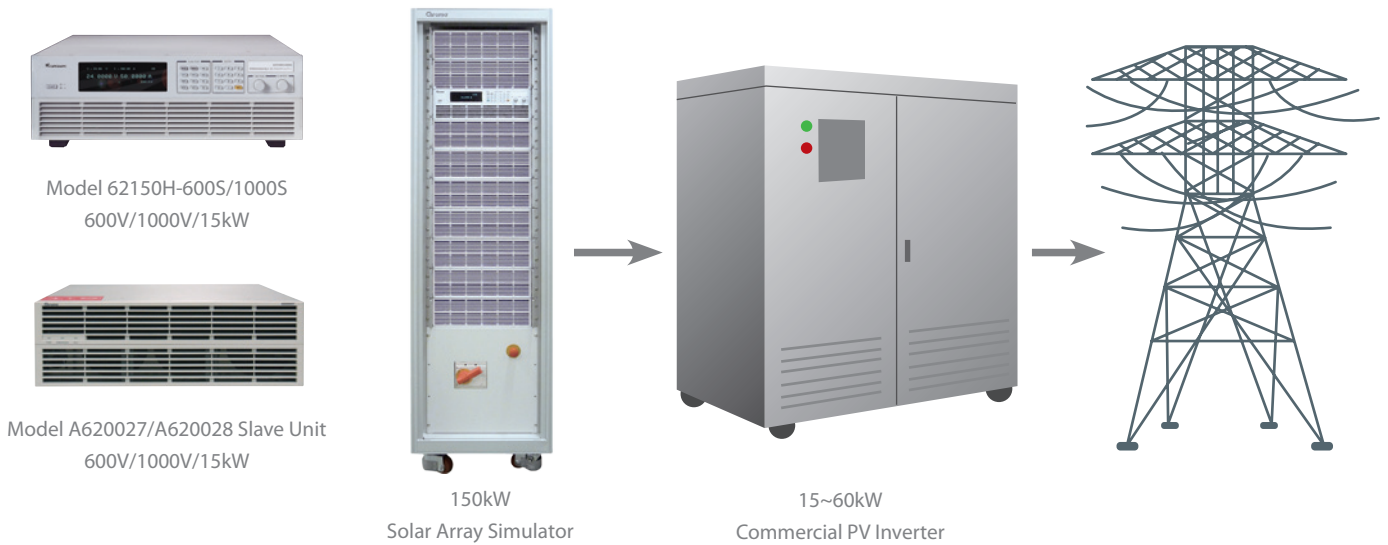

CUSTOMIZATION SOLAR ARRAY SIMULATOR UP TO 1500KW

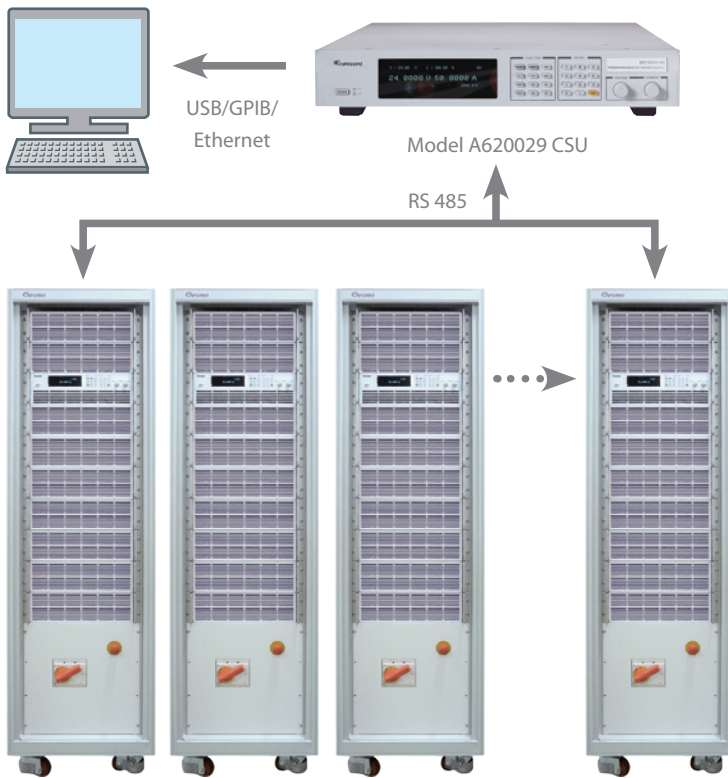

Model A620029 CSU

- Connect multiple 150kW solar array simulator in parallel (0~1000V/0~2500A/0~1500kW)
- Simultaneous display of output voltage and current
- Current sharing capability up to 1.5MW
- Standard USB/GPIB/Ethernet interface




60~500kW Utility PV Inverter

Note :

In order to substantially reduce harmonic currents and increase energy efficiency, please adding a Schaffner ECOSINE™-Passive Harmonic Filters device between power supply and grid.

CUSTOMIZATION SOLAR ARRAY SIMULATOR 1500V/60A/90KW


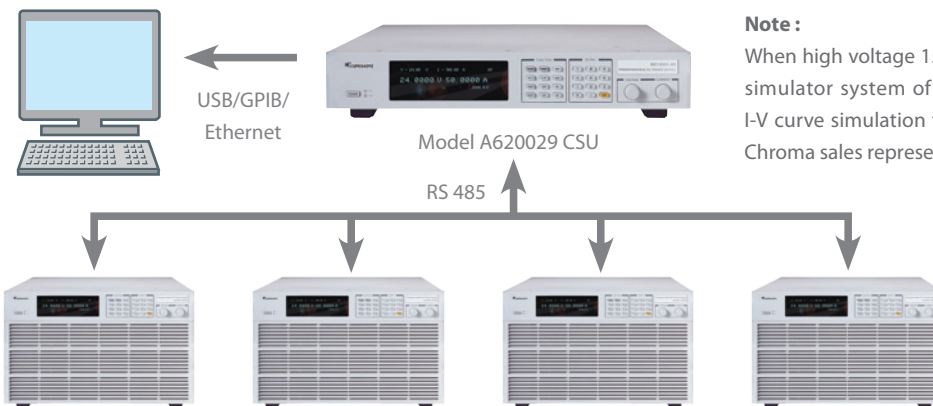


Note :

When high voltage 1500V is required, the customized solar array simulator system of 1500V/60A/90kW which can provide the I-V curve simulation for PV Inverter testing, please contact with Chroma sales representative for detailed information.

1500V/60A/90kW output Solar Array Simulator

PANEL DESCRIPTION

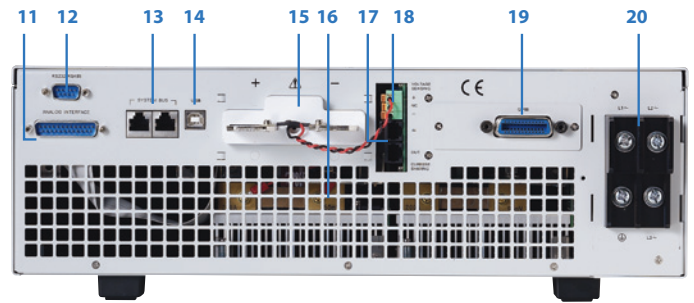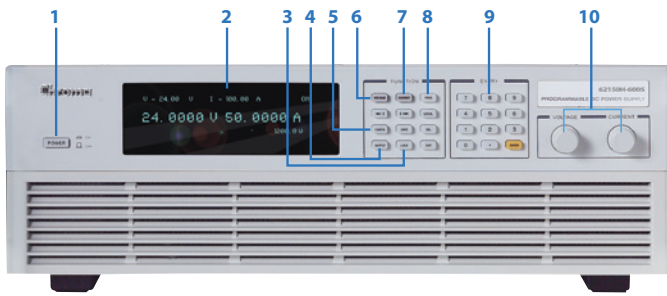

1. POWER Switch

2. VFD Display

Display setting, readings and operating status

3. LOCK Key

Lock all settings

4. OUTPUT Key

Enable or disable the output

5. CONFIG Key

Set the system configuration

6. VOLTAGE Key

Set the output voltage

7. CURRENT Key

Set the output current

8. PROG Key

Program the sequence

9. NUMERIC Key

Set the data

10. ROTARY Key

Adjust the V&I and set the parameter

11. Analog programming interface

For analog level to program and monitor output voltage & current

12. RS-232 or RS-485 Interface (alternative)

13. System Bus

For master/slave parallel and series control

14. USB Interface

15. OUTPUT Terminal

Connect the output cable to a UUT

16. System Fan

With fan speed control

17. Current Sharing Terminal

Connect the cable to slave unit

18. Sense Terminal

Connect the UUT for voltage compensation

19. GPIB or ETHERNET Interface (optional)

20. AC Input Terminal

ORDERING INFORMATION


Power Rating	62000H-S Series Programmable DC Power Supply
2kW	62020H-150S : Programmable DC Power Supply 150V/40A/2kW with Solar Array Simulation
5kW	62050H-600S : Programmable DC Power Supply 600V/8.5A/5kW with Solar Array Simulation
10kW	62100H-600S : Programmable DC Power Supply 600V/17A/10kW with Solar Array Simulation
15kW	62150H-600S : Programmable DC Power Supply 600V/25A/15kW with Solar Array Simulation
	62150H-1000S : Programmable DC Power Supply 1000V/15A/15kW with Solar Array Simulation
Options	A620024 : GPIB Interface for 62000H series (Factory installed)
	A620025 : Ethernet Interface for 62000H series (Factory installed)
	A620026 : Rack Mounting kit for 62000H series
	A620027 : Parallelable Power Stage 15kW for 62150H-600S
	A620028 : Parallelable Power Stage 15kW for 62150H-1000S
	A620029 : Control and Supervisor Unit for 150kW~1.5MW
	A620030 : 19" Rack (41U) for 62000H-S Series (380Vac input)
B620000 : 19" Rack Mounting Kit 2U for 62020H-150S	

Note *1 : Call for more information regarding the customized solar array simulator of 150kW~1.5MW.

Note *2 : All models output power are available for 200/220Vac, 380/400Vac and 440/480Vac line voltage.



Model 62020H-150S

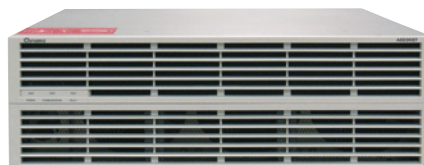

A620027/A620028

ELECTRICAL SPECIFICATIONS-WITH SOLAR ARRAY SIMULATION

MODEL	62020H-150S	62050H-600S	62100H-600S	62150H-600S	62150H-1000S
Output Ratings					
Output Voltage	0-150V	0-600V	0-600V	0-600V	0-1000V
Output Current	0-40A	0-8.5A	0-17A	0-25A	0-15A
Output Power	2000W	5000W	10000W	15000W	15000W
Line Regulation					
Voltage	+/- 0.01% F.S.				
Current	+/- 0.05% F.S.				
Load Regulation					
Voltage	+/- 0.05% F.S.				
Current	+/- 0.1% F.S.				
Voltage Measurement					
Range	60V / 150V	120V / 600V	120V / 600V	120V / 600V	200V / 1000V
Accuracy	0.05% + 0.05%F.S.				
Current Measurement					
Range	16A / 40A	3.4A / 8.5A	6.8A / 17A	10A / 25A	6A / 15A
Accuracy	0.1% + 0.1%F.S.				
Output Noise&Ripple					
Voltage Noise(P-P)	450 mV	1500 mV	1500 mV	1500 mV	2550 mV
Voltage Ripple(rms)	65 mV	650 mV	650 mV	650 mV	1950 mV
Current Ripple(rms)	80 mA	150 mA	300 mA	450 mA	270mA
OVP Adjustment Range					
Range	0-110% programmable from front panel, remote digital inputs.				
Accuracy	+/- 1% of full-scale output				
Programming Response Time					
Rise Time: 50%F.S. CC Load	10ms (6.66A loading)	30ms	30ms	30ms	25ms
Rise Time: No Load	10ms	30ms	30ms	30ms	25ms
Fall Time: 50%F.S. CC Load	10ms (6.66A loading)	30ms	30ms	30ms	25ms
Fall Time: 10%F.S. CC Load	83ms (1.33A loading)	100ms	100ms	100ms	80ms
Fall Time: No Load	300ms	1.2s	1.2s	1.2s	3s
Slew Rate Control					
Voltage Slew Rate Range	0.001V/ms - 15V/ms	0.001V/ms - 20V/ms	0.001V/ms - 20V/ms	0.001V/ms - 20V/ms	0.001V/ms - 40V/ms
Current Slew Rate Range	0.001A/ms - 1A/ms, or INF	0.001A/ms - 0.1A/ms, or INF	0.001A/ms - 0.1A/ms, or INF	0.001A/ms - 0.1A/ms, or INF	0.001A/ms - 0.1A/ms, or INF
Minimum Transition Time	0.5ms				
Transient response time	Recovers within 1ms to +/- 0.75% of steady-state output for a 50% to 100% or 100% to 50% load change(1A/us)				
Efficiency	0.77(Typical)	0.87(Typical)			
Programming & Measurement Resolution					
Voltage (Front Panel)	10 mV	10 mV	10 mV	10 mV	100mV
Current (Front Panel)	1mA	1mA	1mA	1mA	1mA
Voltage (Digital Interface)	0.002% of Vmax				
Current (Digital Interface)	0.002% of Imax				
Voltage (Analog Interface)	0.04% of Vmax				
Current (Analog Interface)	0.04% of Imax				
Programming Accuracy					
Voltage (Front Panel and Digital Interface)	0.1% of Vmax				
Current (Front Panel and Digital Interface)	0.3% of Imax				
Voltage (Analog Interface)	0.2% of Vmax				
Current (Analog Interface)	0.3% of Imax				
Parallel Operation*2					
	Master / Slave control via CAN for 10 units up to 150kW. *1 (Parallel: ten units)				
Auto Sequencing (I-V program)					
Number of program	10				
Number of sequence	100				
Dwell time Range	1s - 15,000S				
Trig. Source	Manual / Auto				

All specifications are subject to change without notice. Please visit our website for the most up to date specifications.

Note*1 : Max. Power is 20kW for 62020H-150S.

Note*2 : There is parallel mode for DC power supply when the I-V curve function is enabled.

GENERAL SPECIFICATIONS

MODEL	62020H-150S	62050H-600S	62100H-600S	62150H-600S	62150H-1000S	
Remote Interface						
Analog programming	Standard					
USB	Standard					
RS232	Standard					
RS485	Standard					
GPIO	Optional					
Ethernet	Optional					
System bus(CAN)	Standard for master/slave control					
GPIO Command Response Time						
Vout setting	GPIO send command to DC source receiver <20ms					
Measure V&I	Under GPIO command using Measure <25ms					
Analog Interface (I/O) *						
Voltage and Current Programming Inputs (I/P)	0-10Vdc / 0-5Vdc / 0-5k ohm / 4-20 mA of F.S.					
Voltage and Current monitor output (O/P)	0-10Vdc / 0-5Vdc / 4-20mA of F.S.					
External ON/OFF (I/P)	TTL:Active Low or High(Selective)					
DC_ON Signal (O/P)	Level by user define. (Time delay = 1 ms at voltage slew rate of 10V/ms.)					
CV or CC mode Indicator (O/P)	TTL Level High=CV mode ; TTL Level Low= CC mode					
OTP Indicator (O/P)	TTL: Active Low					
System Fault indicator(O/P)	TTL: Active Low					
Auxiliary power supply(O/P)	Nominal supply voltage : 12Vdc / Maximum current sink capability: 10mA					
Safety interlock(I/P)	Time accuracy: <100ms					
Remote inhibit(I/P)	TTL: Active Low					
Auto Sequencing(List Mode)						
Number of program	10					
Number of sequence	100					
Dwell time Range	5ms - 15000S					
Trig. Source	Manual / Auto / External					
Auto Sequencing (Step Mode)						
Start voltage	0 to Full scale					
End voltage	0 to Full scale					
Run time	10ms - 99hours					
Input Specification						
AC Input Volatage 3Phase, 3Wire+Ground	1Ø 200~220Vac ± 10% V _{LN}	3Ø 200~220Vac ± 10% V _{LL} 3Ø 380~400Vac ± 10% V _{LL} 3Ø 440~480Vac ± 10% V _{LL}				
AC Frequency range	47 ~ 63Hz					
Max Current (each phase)	200/220Vac	15.2A	39A	69A	93A	93A
	380/400Vac	--	22A	37A	50A	50A
	440/480Vac	--	19A	32A	44A	44A
General Specification						
Maximum Remote Sense Line Drop Compensation	2% of full scale voltage per line (4% total)					
Operating Temperature Range	0°C ~ 40°C					
Storage Temperature Range	-40°C ~ +85°C					
Dimension (HxWxD)	89 x 428 x 465 mm/ 3.5 x 16.85 x 16.73 inch	132.8 mm x 428 mm x 610 mm / 5.23 x 16.85 x 24.02 inch				
Weight	Approx. 17 kg / 37.44 lbs	Approx. 23 kg / 55.70 lbs	Approx. 29 kg / 63.88 lbs	Approx. 35 kg / 77.09 lbs	Approx. 35 kg / 77.09 lbs	
Approval	CE	CE	CE	CE	CE	

All specifications are subject to change without notice. Please visit our website for the most up to date specifications.

Note * : None APG interface for A620027/A620028

HEADQUARTERS
CHROMA ATE INC.
66 Huaya 1st Road,
Guishan, Taoyuan
33383, Taiwan
T +886-3-327-9999
F +886-3-327-8898
www.chromaate.com
info@chromaate.com

U.S.A.
CHROMA SYSTEMS
SOLUTIONS, INC.
19772 Pauling,
Foothill Ranch,
CA 92610
T +1-949-600-6400
F +1-949-600-6401
www.chromausa.com
sales@chromausa.com

EUROPE
CHROMA ATE EUROPE B.V.
Morsestraat 32,
6716 AH Ede,
The Netherlands
T +31-318-648282
F +31-318-648288
www.chromaeu.com
sales@chromaeu.com

JAPAN
CHROMA JAPAN CORP.
888 Nippa-cho, Kouhoku-ku,
Yokohama-shi, Kanagawa,
223-0057 Japan
T +81-45-542-1118
F +81-45-542-1080
www.chroma.co.jp
info@chroma.co.jp

CHINA
CHROMA ELECTRONICS
(SHENZHEN) CO., LTD.
8F, No.4, Nanyou Tian An
Industrial Estate, Shenzhen,
China PC: 518052
T +86-755-2664-4598
F +86-755-2641-9620
www.chroma.com.cn
info@chromaate.com

SOUTHEAST ASIA
QUANTEL PTE LTD.
(A company of Chroma Group)
46 Lorong 17 Geylang # 05-02
Enterprise Industrial Building,
Singapore 388568
T +65-6745-3200
F +65-6745-9764
www.quantel-global.com
sales@sg.quantel-global.com