



## LCR METER MODEL 11022/11025

The Chroma 11022 and 11025 LCR Meters are passive component testers that give you the most cost effective alternative equivalent to other high priced meters. They are designed for the demanding applications of production test, incoming inspection, component design and evaluation. Programmable test signal level settings are from 10mV to 1V in steps of 10mV, and the VM/IM signal level monitor functions allow you to evaluate your devices at the level you specify. Ten test frequencies of 50Hz, 60Hz, 100Hz, 120Hz, 1kHz, 10kHz, 20kHz, 40kHz, 50kHz, and 100kHz, can be used to evaluate passive components and transformers/ LF coils.

Other low cost LCR meters on the market have shortcomings when used for low impedance component evaluations, such as the large capacitance of electrolytic capacitors and low inductance of coils. As the 11022/11025 are equipped with high resolution (0.01mΩ) in low impedance, and high accuracy (0.3%) up to the 100mΩ range, they can be used to evaluate low impedance components to meet measurement requirements.

The 11025 LCR Meter can also measure DC resistance, turn ratio and mutual inductance

of transformers. It is suitable for pulse transformer or LF coil evaluation. When used with Chroma's Transformer Test Fixture, the 11025 can measure both the primary and the secondary parameters automatically by changing the internal relays in the 11025. With this, there is no need to change the connections required for measuring transformer parameters. With an adjustable internal DC bias current source up to 200mA as a standard function, the 11025 is the right tool for inductance inspection of telecom transformers and small power chokes under DC bias current.

The 11022/11025 LCR Meters provide a powerful combination of features designed to maximize productivity in all testing environments. Measurement speed in the SHORT integration time mode is 15mS ( $\geq 100\text{Hz}$ ). Handler interface, Pin-out, GPIB Interface, and IEEE 488 commands are compatible with 4263B.

Finally, the 11022/11025 have a built in comparator, 8 bin sorting, trigger delay functions, and handler interface trigger functions, making system integration easy, and improving measurement throughput as well as reliability.



## MODEL 11022/11025

### KEY FEATURES

- 0.1% basic accuracy
- Transformer test parameters (11025), Turns Ratio, DCR, Mutual Inductance
- 50Hz, 60Hz, 100Hz, 120Hz, 1kHz, 10kHz, 20kHz, 40kHz, 50kHz, 100kHz test frequencies
- 21ms measurement time ( $\geq 100\text{Hz}$ )
- Agilent 4263B LCR Meter commands compatible
- 4 different output resistance modes selectable for non-linear inductor and capacitor measuring
- High resolution in low impedance (0.01mΩ) and high accuracy 0.3% till 100mΩ range
- Adjustable DC bias current up to 200mA (constant 25Ω) (11025)
- 1320 Bias Current Source directly control capability
- 0.01mΩ-99.99MΩ wide measurement range (4½ digits)
- Dual frequency function for automatic production
- BIAS comparator function
- Comparator function and 8/99 bin-sorting function
- Pass/fail judge result for automatic production
- Handler interface trigger edge (rising/falling) programmable
- Test signal level monitor function
- Standard GPIB, RS-232, and handler interface
- Open/short zeroing, load correction
- LabView® Driver



**Chroma**  
Advancing Excellence


## SPECIFICATIONS

Model	11022	11025
Test Parameter	L, C, R,  Z , Q, D, ESR, X, $\theta$	L, C, R,  Z , Q, D, ESR, X, $\theta$ DCR4, M, Turns Ratio, L2, DCR2
Test Signals	10mV-1V, step 10mV; $\pm(10\% + 3mV)$	
Level	50Hz, 60Hz, 100Hz, 120Hz, 1kHz, 10kHz, 20kHz, 40kHz, 50kHz, 100kHz; $\pm 0.01\%$	
Frequency	Constant 107X: 25 $\Omega$ ; Constant 320X: 100 $\Omega$ ; Constant 106X: 2 $\Omega$ , for $Z \geq 10 \Omega$ , 100mA (1V setting) for reactive load $\leq 10 \Omega$ ; Constant 102X: 25 $\Omega$ , for $Z < 1 \Omega$ , 100 $\Omega$ for else	
Output Impedance (Nominal Value)	50mA max. for Constant 100 $\Omega$ , 200mA max for Constant 25 $\Omega$ (AC level $\leq 100mV$ )	
DC Bias Current (Freq. $\geq 1kHz$ )	--	
Measurement Display Range		
C (Capacitance)	0.001pF-1.9999F	
L, M, L2 (Inductance)	0.001 $\mu$ H-99.99k	
Z (Impedance), ESR	0.01m $\Omega$ -99.99M $\Omega$	
Q (Quality Factor)	0.0001-9999	
D (Dissipation Factor)	0.0001-9999	
$\theta$ (Phase Angle)	-180.00° to +180.00°	
Turns Ratio (Np: Ns)	--	0.9-999.99
DCR	--	0.01m $\Omega$ -99.99M $\Omega$
Basic Measurement Accuracy *1	$\pm 0.1\%$	
Measurement Time (Fast) *2	21ms	
Interface & I/O		
Interface	handler (50pin), GPIB, RS-232	
Output Signal	Bin-sorting & HI/GO/LOW judge	
Comparator	Upper/Lower limits in value	
Bin Sorting	8/99 bin limits in %, ABS	
Trigger Delay	0-9999ms	
Display	240 x 64 dot-matrix LCD display	
Function		
Correction	Open/Short zeroing, load correction	
Averaging	1-256 programmable	
Cable Length	0m, 1m, 2m, 4m	
Test Sig. Level Monitor	Voltage, Current	
Equivalent Circuit mode	Series, Parallel	
Memory (Store/ Recall)	50 instrument setups	
Trigger	Internal, Manual, External, BUS	
General		
Operation Environment	Temperature: 10°C to 40°C, Humidity: < 90 % R.H.	
Power Consumption	65VA max.	
Power Requirements	90-132Vac or 180-264Vac, 47-63Hz	
Dimensions (H x W x D)	100 x 320 x 347.25 mm/3.94 x 12.6 x 13.67 inch	
Weight	5.5 kg/12.11 lbs	

Note\*1: 23  $\pm$  5°C after OPEN and SHORT correction. Slow measurement speed. Refer to Operation Manual for detailed measurement accuracy descriptions.

Note\*2: Measurement time includes sampling, calculation and judgment of primary and secondary test parameter measurement.

## PANEL DESCRIPTION

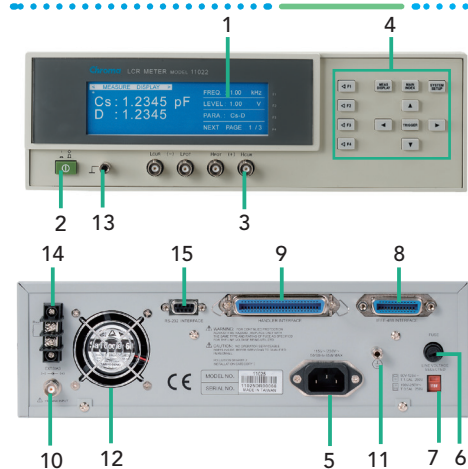

1. LCD Display
2. LINE Switch
3. Measurement Terminals
4. Function Keys
5. Power Cord Receptacle
6. LINE Fuse Holder
7. LINE Voltage Selector
8. GPIB Interface
9. Handler Interface
10. External DC Bias Terminal
11. Ground Terminal
12. Fan
13. Ground Terminal
14. DC Bias Trimmer Terminal
15. RS-232 interface

## ORDERING INFORMATION

- 11022: LCR Meter  
 11025: LCR Meter  
 A110104: SMD Test Cable #17  
 A110211: Component Test Fixture  
 A110212: Component Remote Test Fixture  
 A110232: 4 BNC Test Cable with Clip#18  
 A110234: High Frequency Test Cable  
 A110236: 19" Rack Mounting Kit  
 A110239: 4 Terminals SMD Electrical Capacitor Test Box (Patent)  
 A110242: Battery ESR Test Kit  
 A110244: High Capacitance Capacitor Test Fixture  
 A110245: Ring Core Test Fixture  
 A113012: Vacuum Generator for A132574  
 A113014: Vacuum Pump for A132574  
 A132574: Test Fixture for SMD power choke  
 A133004: SMD Test Box  
 A133019: BNC Test Lead, 2M (single side open)  
 A165009: 4 BNC Test Cable with Probe

HEADQUARTERS  
 CHROMA ATE INC.  
 88 Wenmao Rd.,  
 Guishan Dist.,  
 Taoyuan City  
 333001, Taiwan  
 T +886-3-327-9999  
 F +886-3-327-8898  
 www.chromaate.com  
 info@chromaate.com

U.S.A.  
 CHROMA SYSTEMS  
 SOLUTIONS, INC.  
 19772 Pauling,  
 Foothill Ranch,  
 CA 92610, USA  
 T +1-949-600-6400  
 F +1-949-600-6401  
 www.chromausa.com  
 sales@chromausa.com

EUROPE  
 CHROMA ATE EUROPE B.V.  
 Morsestraat 32, 6716 AH  
 Ede, The Netherlands  
 T +31-318-648282  
 F +31-318-648288  
 www.chroma.eu.com  
 salesnl@chroma.eu.com

CHROMA GERMANY GMBH  
 Südtiroler Str. 9, 86165,  
 Augsburg, Germany  
 T +49-821-790967-0  
 F +49-821-790967-600  
 www.chroma.eu.com  
 salesde@chroma.eu.com

JAPAN  
 CHROMA JAPAN  
 CORP.  
 888 Nippa-cho,  
 Kouhoku-ku,  
 Yokohama-shi,  
 Kanagawa,  
 223-0057 Japan  
 T +81-45-542-1118  
 F +81-45-542-1080  
 www.chroma.co.jp  
 info@chroma.co.jp

KOREA  
 CHROMA ATE  
 KOREA BRANCH  
 312, Gold Tower,  
 14-2, Pangyoyeok-ro  
 192, Bundang-gu,  
 Seongnam-si,  
 Gyeonggi-do,  
 13524, Korea  
 T +82-31-781-1025  
 F +82-31-8017-6614  
 www.chromaate.co.kr  
 info@chromaate.com

CHINA  
 CHROMA ELECTRONICS  
 (SHENZHEN) CO., LTD.  
 8F, No.4, Nanyou Tian  
 An Industrial Estate,  
 Shenzhen, China  
 T +86-755-2664-4598  
 www.chroma.com.cn  
 info@chromaate.com

SOUTHEAST ASIA  
 QUANTEL PTE LTD.  
 (A company of Chroma Group)  
 25 Kallang Avenue #05-02  
 Singapore 339416  
 T +65-6745-3200  
 F +65-6745-9764  
 www.quantel-global.com  
 sales@quantel-global.com